



**PRODUCT DESCRIPTION**

Part Number	RAV225512
NSN	Not Assigned
Market	Military-Air

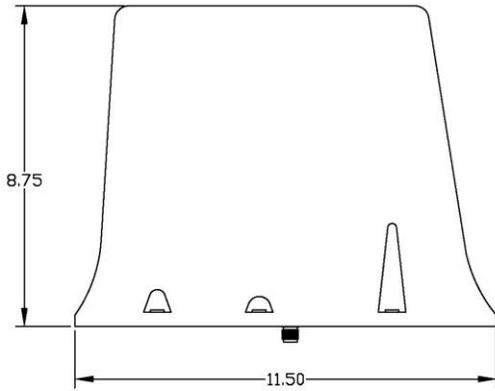

The RAV225512 is a broadband airborne communications antenna designed for airspeeds less than Mach 1. The antenna housing is a fiberglass epoxy design to withstand the exposure to sand and dust particles of desert areas. The antenna is foam filled to reduce the effects of extreme temperature changes, extreme humidity and excessive shock and vibration. It is mechanically and environmentally qualified to MIL-A-55680 (AT-1108) and has continuous operation altitudes of up to 50,000 feet and temperatures between -65° F and 131° F. It can also withstand the impact shock of 30g and the steady-state acceleration of 6g. This antenna has the same mounting pattern and footprint as the AT-1108/ARC for easy interchangeability if needed. A conductive mounting gasket is supplied with this product.

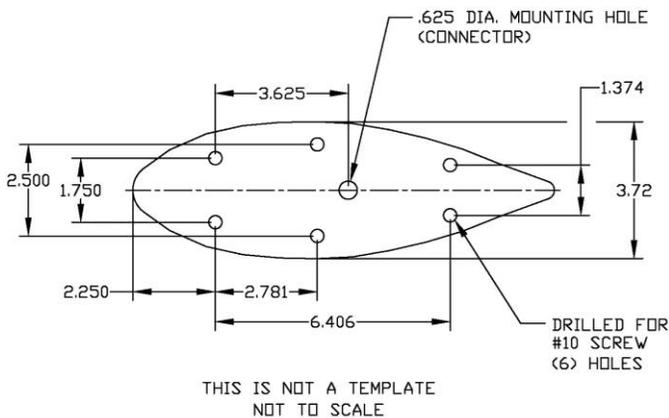

**PRODUCT SPECIFICATIONS**

Application	Airborne Communications	
Frequency	225-512 MHz	
Impedance	50 Ohms Nominal	
VSWR	3.0:1 Max.	
Polarization	Vertical	
Pattern	Omni-Directional	
RF Power Handling	150 Watts CW	
Gain	0 dB Over Monopole	
Connector	"TNC" Female	
Weight	2 Lbs 4.8 oz	
Available Colors	P/N: RAV225512B	CARC Black
	P/N: RAV225512G	CARC Green
	P/N: RAV225512W	CARC White
	P/N: RAV225512T	CARC Tan
	P/N: RAV225512GY	CARC Gray